Water detector

Instruction manual

Device description


The water detector protects downstream water-cooled systems from damage that can occur due to a decline or interruption of the cooling water flow. It is installed at the end of the cooling water flow.

Proper functioning is only possible if the water monitor is installed vertically.

The hose connections for the water inlet and drain are located at the bottom of the device. The inlet hose is connected to the side of the water monitor where the four holes in the housing cover are located. Through these holes, it is possible to observe the magnetic float in the glass tube during operation.

On the top of the device there are two indicator lights that provide information about the operating status of the water monitor; the yellow lamp indicates normal operation, the red lamp lights up in the event of a malfunction.

Electrical appliances (e.g. heating mantle, magnetic stirrer) are connected to the adapter plug. If the cooling medium fails, the water monitor switches off all connected electical draws, the **red lamp** lights up and an alarm will sound.

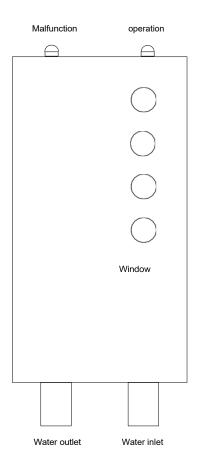

Technical data

Voltage	230 V
Frequency	50 Hz
Max. connected load	1800 W

<u>Safety</u>

- Connect the device only to a socket with a protective conductor
- Use only in dry rooms
- Do not operate water monitors and connected electrical appliances with wet hands
- Secure hose connections with hose clamps
- Pay attention to vertical installation position
- Do not cover the top of the appliance
- Check the water monitor before each use for proper functioning and obvious defects
- Annual inspection by a qualified electrician is required
- If defects or irregularities are found, discontinue its operation and notify a qualified electrician
- Repairs can only be carried out by qualified electricians

Not functioning	 Plug not properly inserted into the socket Socket without voltage Consumers (e.g. heating mantle)] are not plugged into an adapter plug and on
Red indicator light is on and warning signal sounds	 Faucet not open Water pressure too low Water hose has leak or connection is leaking Float stuck in glass tube
Not functioning, although mains socket OK	Defective microfuse in the water monitor, inform a qualified electrician
Water monitor does not switch off	Notify a qualified electrician

Malfunctions and causes

In the event of any further malfunctions, contact the responsible electrician